Oracle ZFS Storage Appliance

Oracle ZFS Storage Appliance systems provide high-performance enterprise storage with NAS, SAN, object, and cloud storage capabilities for the most demanding applications and workloads. As Oracle engineered storage, Oracle ZFS Storage Appliance systems are deeply integrated with Oracle Database, Oracle engineered systems, and Oracle Public Cloud to maximize the return on your Oracle software investment in ways that competitive storage systems are unable to achieve. Oracle ZFS Storage Appliance systems provide material benefits when you need to accelerate mission-critical applications and increase business and IT productivity—enabling you to save valuable resources, reduce risk, and lower your total cost of ownership (TCO).

Extreme Enterprise Storage Performance

Oracle ZFS Storage Appliance systems are based on an advanced hardware and software architecture. It includes a highly intelligent, multithreading SMP storage operating system that makes the most of modern enterprise hardware and enables you to run multiple workloads and advanced data services without performance degradation. This powerful OS is complemented by the unique Hybrid Storage Pool design, which automatically caches data in dynamic random-access memory (DRAM) and flash cache to provide optimal performance and exceptional efficiency while ensuring that data remains safely stored on reliable and high capacity solid-state disk (SSD) or hard disk drive (HDD) storage. With the hybrid storage pool design, heavily accessed data is served mostly from cache—up to 90 percent—to accelerate your applications with extremely high throughput and low latency for diverse, demanding workloads.

Oracle ZFS Storage Appliance also integrates high-availability (HA) features such as active-active controller clustering for failover and a self-healing file system architecture that ensures end-to-end data integrity. By combining reliability with a rich set of enterprise-class data services, Oracle ZFS Storage Appliance systems are an ideal choice to meet your demanding enterprise storage needs.





Key Business Benefits

- Accelerate Oracle
 Database and
 applications with
 extreme performance
- Maximize return on Oracle software investments
- Accelerate development and testing with instant, no-overhead snapshots and cloning plus support for highly virtualized environments
- Reduce IT complexity, management, and costs by consolidating NAS, SAN, and object storage in a single system
- Increase IT agility with simultaneous support for production, dev/test, and data protection workloads
- Reduce the risks and costs of security breaches with granular encryption
- Reduce TCO with superior price per performance and price per terabyte ratios



Figure 1. DRAM-centric architecture

Superior Efficiency

Oracle ZFS Storage Appliance systems feature an advanced set of management and analytics tools that enable storage administrators to rapidly provision, manage, and troubleshoot storage related issues. Rapid deployment of powerful advanced data services—unlimited snapshots, clones, thin provisioning, five different compression algorithms, and replication are managed via the intuitive browser user interface (BUI) or the command-line interface (CLI).

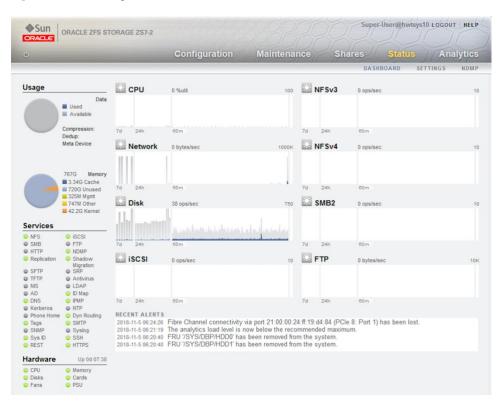


Figure 2. Status view of management software

The DTrace Analytics feature of Oracle ZFS Storage Appliance systems provide real-time analysis and monitoring functionality, enabling unparalleled fine-grained visibility into disk, flash, controller CPU, networking, cache, virtual machine (VM), and other statistics. It does this in a way that uniquely ties client network interface activity back to the storage devices with everything in between.

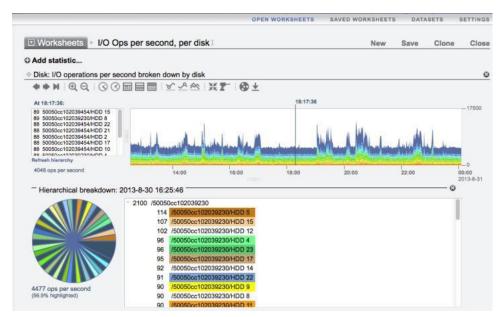


Figure 3. DTrace Analytics example showing I/O operations per second, per disk

This granular visibility—at the I/O, VM, or pluggable database level—supports rapid identification and resolution of bottlenecks for superior system performance tuning and troubleshooting, particularly in large-scale virtual server environments. As proven by internal use in Oracle's IT environment and by independent testing, the management efficiency of Oracle ZFS Storage Appliance systems simplify storage management and significantly increases the number of terabytes of data each administrator can handle, resulting in significant operational cost savings.

Oracle Database Integration

Oracle ZFS Storage Appliance systems are deeply integrated with Oracle Database to improve performance, increase efficiencies, and lower TCO. Through engineering, developing, testing, and supporting hardware and software together, Oracle engineered storage systems deliver unique capabilities that enable Oracle software to run faster and more efficiently. Oracle ZFS Storage Appliance systems are co-engineered with Oracle software and supported with documented solutions and best practices that remove the guesswork from configuring a total system for success through the following features:

• Oracle Intelligent Storage Protocol

- Oracle Intelligent Storage Protocol (OISP) is a unique storage protocol exclusive to Oracle Database 12 c and later versions running with Oracle ZFS Storage Appliance systems. It enables a storage system to receive cues from Oracle Database about its data stream at an unprecedented level. Information about the type and importance of each read and write operation are sent from Oracle Database to the Oracle ZFS Storage Appliance system so it can intelligently process I/O and automatically and dynamically tune itself for optimal performance so the most critical database operations are given higher priority, thereby enabling databases to run faster with no manual tuning required. OISP has the added advantage of speeding provisioning by reducing tedious manual operations by 90 percent, which can reduce the risk of human error.
- These self-tuning capabilities also prevent data blocks associated with high-bandwidth database operations, such as Oracle Recovery Manager (Oracle RMAN) backups, from taking up critical space in DRAM cache, freeing it up so latency-sensitive database operations can achieve maximum acceleration. And, with Automatic Workload Repository—aware extended analytics capabilities, IT administrators can see OISP operations by database name, database function, and database file types so they can do deep drill-downs on the I/O operations even at the pluggable database level. This provides valuable insights into the nature of database operations leading to faster and more effective troubleshooting efforts especially in complex multitenant Oracle Database 12c and later environments.



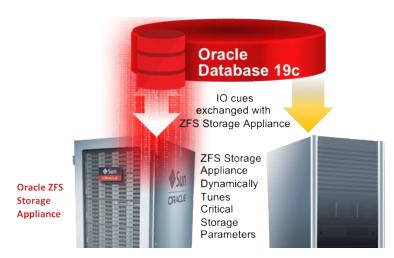


Figure 4. Oracle Database 19c and later and Oracle Intelligent Storage Protocol

Oracle Hybrid Columnar Compression

Oracle Database workloads for data warehousing, analytics, and archive can achieve a 10x to 50x reduction in their data volumes and can accelerate queries by 3x to 8x by using the Oracle Hybrid Columnar Compression feature of Oracle Database. Available only on Oracle storage products, this maximum data reduction solution for Oracle Database helps you achieve a significant reduction in your storage footprint and associated data center costs. Furthermore, the Automatic Data Optimization feature of Oracle Database 12c and later versions enables you to set policies to initiate Oracle Hybrid Columnar Compression and data tiering based on actual data usage to automate the management of data throughout its lifecycle.

Oracle Enterprise Manager Plug-in for Oracle ZFS Storage Appliance and Oracle VM Storage Connect Plug-in for Oracle ZFS Storage Appliance

Oracle Enterprise Manager Plug-in for Oracle ZFS Storage Appliance provides end-to-end storage management visibility across the enterprise, and enables monitoring and provisioning at the share, LUN, or project. Oracle VM Storage Connect Plug-in for Oracle ZFS Storage Appliance enables Oracle VM to provision and manage Oracle ZFS Storage Appliance systems for streamlined virtualization implementation. These plugins enable easier implementation, better visibility, and holistic management efficiencies.

Cloud Integration

Traditional storage architectures lack the resources required to support highly virtualized dynamic cloud workloads. Oracle ZFS Storage Appliance systems are:

- Cloud-architected. Based on the architectural advantages of a symmetric multiprocessing (SMP) operating system (OS) combined with Oracle ZFS Storage Appliance system's Hybrid Storage Pool technology, these systems provide a superior design that delivers sustained high performance for consolidated on-premises and private cloud workloads.
- Cloud-managed. Oracle ZFS Storage Appliance systems support OpenStack and Oracle Enterprise Manager Cloud Control cloud management frameworks with RESTful APIs so you can integrate them into any environment.
- Cloud integrated. Unlike competitive suppliers that have no public cloud of their own, Oracle ZFS Storage Appliance enables
 you to integrate your on-premises storage systems with Oracle Public Cloud to simplify your journey to the cloud. Oracle ZFS
 Storage Appliance provides an integrated cloud snapshot backup feature that reduces on-premises costs and provides flexible
 archive and recovery options. An Oracle ZFS Storage image is available in OCI Marketplace to assist Oracle customers
 migrating workloads and data to Oracle's cloud.

Architecture and Configuration Options

The architecture of Oracle ZFS Storage Appliance systems is based upon three primary components:



- **Software.** The unique, intelligent multithreading SMP storage OS provides enterprise-class data services and robust data protection, while Hybrid Storage Pool technology manages the dynamic caching. Most data services, including the systems' DTrace Analytics feature are included in the base systems.
- **Controller.** A robust, powerful storage controller—which is based on cost-effective, enterprise-grade x86 servers from Oracle—delivers high-performance compute power and massive DRAM. Optional dual-controller cluster configurations provide high availability with rapid failover.
- Storage. Enterprise-grade storage enclosures are available with either all-flash storage, all HDD storage, or a combination of both SSDs and HDDs that enable you to optimize different storage pools for a wide range of performance and capacity requirements. They are built using the latest generation of SAS HDDs and SSDs combined with read and write flash accelerators for high performance and high availability.

Two controller models are available:

- Oracle ZFS Storage ZS9-2 mid-range. A midrange unified storage system ideal for use with performance-intensive, dynamic workloads at an attractive price point.
- Oracle ZFS Storage ZS9-2 high-end. A high-end enterprise unified storage system for workloads demanding extreme performance and scalability at a price point that rivals competitive midrange and high-end systems.

Both models support high-performance NAS, SAN and object storage access using the same intelligent storage OS, Hybrid Storage Pool technology, and enterprise SAS disk or flash enclosures, but they feature different storage controllers to meet the appropriate level of price/performance required for particular environments.

Racked System

Oracle ZFS Storage Appliance Racked System configurations are fully tested, preassembled storage systems that include non-transferrable replication, cloning, and encryption licenses at no extra charge. Preconfigured Oracle ZFS Storage Appliance Racked System configurations dramatically shorten deployment and implementation time, optimize performance and availability, and reduce risk and TCO. A network configuration option includes 100GbE NICs or switches for connectivity to Oracle Exadata systems for the mission critical RMAN backup use case.

Oracle Platinum Services are available when Oracle ZFS Storage Appliance Racked System are used to back up Oracle Engineered Systems such as Oracle Exadata, ensuring maximum uptime and rapid resolution with 24/7 remote fault monitoring, industry-leading response times, and patch deployment services. Talk to your account representative to learn the minimum configuration requirements to qualify for Oracle Platinum services.

Optional Software

In addition to the rich software suite included with the base systems, you can acquire separate, non-transferrable licensed software features: remote replication, clones, and encryption.



ORACLE ZFS STORAGE APPLIANCE SPECIFICATIONS

	Oracle ZFS Storage ZS9-2 mid-range	Oracle ZFS Storage ZS9-2 high-end	Oracle ZFS Storage Appliance Racked System ZS9-2 mid-range	Oracle ZFS Storage Appliance Racked System ZS9-2 high-end
Configuration	Module shipment	Module shipment	Assembled, tested, and shipped	Assembled, tested, and shipped
Architecture	Dual-controller HA cluster with external storage enclosures	Dual-controller HA cluster with external storage enclosures	Dual-controller HA cluster with external storage enclosures	Dual-controller HA cluster with external storage enclosures
Processors	4x 24-core 2.1 GHz Intel® Xeon® processors (per two controllers)	4x 32-core 2.6 GHz Intel® Xeon® processors (per two controllers)	4x 24-core 2.1 GHz Intel® Xeon® processors	4x 32-core 2.6 GHz Intel® Xeon® processors
DRAM Cache	1 TB or 2 TB (per two controllers)	4 TB (per two controllers)	2 TB (per two controllers)	4 TB (per two controllers)
Read Flash Cache	Up to 737 TB	Up to 1.4 PB	Up to 737 TB	Up to 1.4 PB

STORAGE CONFIGURATIONS

STORAGE CONFIGURATIONS				
	Oracle ZFS Storage ZS9-2 mid-range	Oracle ZFS Storage ZS9-2 high-end	Oracle ZFS Storage Appliance Racked System ZS9-2 mid-range	Oracle ZFS Storage Appliance Racked System ZS9-2 high-end
Disk Storage Options (raw capacity)	 24 TB to 10 PB scalability Up to 24 storage shelves, each with 20 or 24 HDDs With 20 HDDs per disk shelf, choice of 1 to 4 read or write SSD accelerators per disk shelf 	 24 TB to 21 PB scalability Up to 48 storage shelves, each with 20 or 24 HDDs With 20 HDDs per disk shelf, choice of 1 to 4 read or write SSD accelerators per disk shelf 	 24 TB to 10 PB scalability Up to 24 storage shelves, each with 20 or 24 HDDs With 20 HDDs per disk shelf, choice of 1 to 4 read or write SSD accelerators per disk shelf Up to 48 storage shelves, each with 10 or 12 HDDs With 10 HDDs per disk shelf, choice of 2 read or write SSD accelerators per disk shelf 	 24 TB to 21 PB scalability Up to 48 storage shelves, each with 20 or 24 HDDs With 20 HDDs per disk shelf, choice of 1 to 4 read or write SSD accelerators per disk shelf Up to 96 storage shelves, each with 10 or 12 HDDs With 10 HDDs per disk shelf, choice of 2 read or write SSD accelerators per disk shelf
Flash Storage Options (raw capacity)	 153 TB to 4.4 PB scalability 1 to 24 shelves with 20 or 24 SSDs per shelf With 20 SSDs per shelf, choice of 1 to 4 write SSD accelerator 	 153 TB to 8.8 PB scalability 1 to 48 shelves with 20 or 24 SSDs per shelf With 20 SSDs per shelf, choice of 1 to 4 write SSD accelerator 	 153 TB to 4.4 PB scalability 1 to 24 shelves with 20 or 24 SSDs per shelf With 20 SSDs per shelf, choice of 1 to 4 write SSD accelerator 	 153 TB to 8.8 PB scalability 1 to 48 shelves with 20 or 24 SSDs per shelf With 20 SSDs per shelf, choice of 1 to 4 write SSD accelerator
Storage Shelf Options	 Disk storage: Oracle Storage Drive Enclosure DE3-24C: 18 TB, SAS-3, 3.5-inch 7,200 RPM HDDs, 7.68 TB SAS-3, 3.5-inch SSDs, 200 GB SAS-3, 3.5-inch SSDs Oracle Storage Drive Enclosure DE3-24P: 1.2 TB SAS-3 2.5-inch 10,000 RPM HDDs, 7.68 TB SAS-3 2.5-inch SSDs, 200 GB SAS-3 2.5-inch SSDs 			

• Oracle Storage Drive Enclosure DE3-12C: 18 TB SAS-3, 3.5-inch 7,200 RPM HDDs, 7.68 TB SAS-3, 3.5-inch SSDs, 200 GB

SAS-3, 3.5-inch SSDs

• Note: Oracle reserves the right to substitute the DE3-24C and DE3-12C at Oracle's discretion. One or both may be limited by geography and/or configuration.

Flash storage:

• Oracle Storage Drive Enclosure DE3-24P: 7.68 TB SAS-3 2.5-inch SSDs

Note: Maximum number of total drives (HDD and SSD) for high-end: 1152; maximum for mid-range: 57

STANDARD AND OPTIONAL INTERFACES

Interface	Description
Integrated Network	Management ports only
Optional Network Connectivity	10GBASE-T, 10Gb/25Gb/40Gb/100Gb Ethernet (twinax/optical), 32Gb Fibre Channel, 100Gb Ethernet Switch
Optional Tape Backup HBA	Dual-channel 32 Gb FC HBA

Maximum Ports Per System

	Oracle ZFS Storage ZS9-2 mid-range	Oracle ZFS Storage ZS9-2 high-end	Oracle ZFS Storage Appliance Racked System ZS9-2 mid-range	Oracle ZFS Storage Appliance Racked System ZS9-2 high-end
10GBASE-T 10Gb Ethernet, 25Gb Ethernet, 32Gb Fibre Channel, 40Gb Ethernet, 100Gb Ethernet	44/20/20/20/20/8	44/20/20/20/20/8	44/20/20/20/20/8	44/20/20/20/20/8

Note: Full line speed on all ports concurrently may be limited

ENVIRONMENTAL

Specification	Description
Operating Temperature	5°C to 35°C (41°F to 95°F)
Nonoperating Temperature	-40°C to 70°C (-40°F to 158°F)
Operating Relative Humidity	10%–90% relative humidity, noncondensing
Nonoperating Relative Humidity	93% relative humidity, noncondensing
Altitude (Operating)	0 m to $3{,}050 \text{ m}$ (0 ft. to $10{,}007 \text{ ft.}$); maximum ambient temperature is derated by 1 degree C per 300 m above 900 m , except in China where regulations may limit installations to a maximum altitude of $2{,}000 \text{ m}$.
Acoustic Noise	8.1 Bels A-weighted Operating, and 5.8 Bels A-weighted Idling (measured Sound Power). Check your local regulations for noise level exposure limits in the workplace that apply to your installation of Oracle equipment and appropriate use of personal protection equipment.
Other	Meets (American Society of Heating, Refrigerating and Air-Conditioning Engineers) ASHRAE Data Center Class A2



Power and Thermal

Component	Description	Typical	Maximum
Oracle ZFS Storage ZS9-2 mid-range	Power (W)	550 W	756 W
	Thermal (BTU/hr.)	1877 BTU/hr.	2580 BTU/hr.
Oracle ZFS Storage ZS9-2 high-end	Power (W)	569 W	796 W
	Thermal (BTU/hr.)	1941 BTU/hr.	2716 BTU/hr.
Oracle Storage Drive Enclosure DE3-24C	Power (W)	256 W	285 W
	Thermal (BTU/hr.)	875 BTU/hr.	973 BTU/hr.
Oracle Storage Drive Enclosure DE3-12C	Power (W)	161 W	182 W
	Thermal (BTU/hr.)	549 BTU/hr.	621 BTU/hr.
Oracle Storage Drive Enclosure DE3-24P	Power (W)	248 W	298 W
	Thermal (BTU/hr.)	846 BTU/hr.	1,017 BTU/hr.
Oracle ZFS Storage Appliance Racked System	Power (W)	3,784 W	5,714 W
(ZS9-2 high-end HA + 9x DE3-24C)	Thermal (BTU/hr.)	12,912 BTU/hr.	19,497 BTU/hr.

PHYSICAL SPECIFICATIONS

Component	Typical	Maximum
Oracle ZFS Storage ZS9-2 mid-range and high-end (controller only)	Height	86.9 mm (3.4 in.) 2U (rack units)
	Width	482.0 mm (18.97 in.)
	Depth	772 mm (30.04 in.)
	Weight	33.11 kg (73 lb.) fully populated
Oracle Storage Drive	Height	175 mm (6.89 in.) 4U (rack units)
Enclosure DE3-24C (fully loaded with drives)	Width	483 mm (19 in.)
	Depth	630 mm (24.8 in.)
	Weight	46 kg (101.41 lb.)
Oracle Storage Drive	Height	88.9 mm (3.5 in.) 2U (rack units)
Enclosure DE3-12C (fully loaded with drives)	Width	483 mm (19 in.)
	Depth	630 mm (24.8 in)
	Weight	26 kg (52.7 lb.)
Oracle Storage Drive	Height	86.9 mm (3.4 in.) 2U (rack units)
Enclosure DE3-24P (fully loaded with drives)	Width	483 mm (19 in.)
	Depth	630 mm (24.8 in.)
	Weight	24 kg (52.91 lb.)

ORACLE ZFS STORAGE APPLIANCE SOFTWARE

Included Features	Details
Oracle Intelligent Storage Protocol	Oracle Database $12c$ sends metadata to Oracle ZFS Storage Appliance systems about each I/O operation, enabling the systems to dynamically tune themselves for optimal performance; provides visibility at the database level and per-pluggable-database level for actionable insight.
File System	Oracle Solaris ZFS (128-bit addressability)
File-level Protocol	NFS v2/v3/v4/v4.1, SMB1/2/2.1/3/3.1, HTTP, WebDAV, FTP/SFTP/FTPS
Block-level Protocol	ISCSI, Fibre Channel
Object-level Protocol	Oracle OCI, Amazon S3, and Swift-compatible object ingest over HTTP or HTTPS
Cloud Integration	Cloud snapshot backups in ZFS or tar format, integrated OCI-compatible object store on-premise, and Oracle ZFS Storage in OCI Marketplace
Data Compression	Five distinct compression options to balance data reduction with performance for specific workloads
Hybrid Columnar Compression	10x to 50x compression of static Oracle Database data, resulting in a 3x to 5x reduction in storage footprint for data warehousing and long-term storage of information in Oracle Database databases
Data Deduplication	Inline, block-level deduplication
Monitoring	DTrace Analytics (for system tuning and debugging), dashboard monitoring for key system performance metrics, plugin available for Oracle Enterprise Manager
Automated Serviceability	"Phone home" capability with automatic case creation, configurable alerts
RAID	Striping, mirroring, triple mirroring, single-parity, double-parity, triple-parity, wide stripes
Remote Management	HTTPS, SSH, SNMP v1/v2c/v3, IPMI, RESTful API
Snapshots	Read-only, restorable
Directory Services	NIS, AD, LDAP
Data Security	Checksum data and metadata, automatic data validation, and antivirus quarantine
Network Services	NTP, DHCP, SMTP
Backup	NDMP v3/v4, ZFS NDMP
Local Replication	Replication within the same Oracle ZFS Storage Appliance configuration (single or cluster)
QoS/Throttling	Limit NFS, SMB, and LUN I/O consumption to better balance system resources

Separately Licensed Features	Details
Clones	Writable snapshots (included in racked system configurations)
Remote Replication	Replication from one Oracle ZFS Storage Appliance product to another. 1:N, N:1, manual, scheduled, or continuous (included in racked system configurations)
Encryption	Two-tier data encryption with strong encryption algorithms (AES 256/192/128), set at the project/share/LUN level or pool level. Encryption keys can be managed in a local keystore or centrally managed with Oracle Key Manager. Data encryption is included in the racked system configuration.



Oracle Support

Oracle Premier Support services provide the complete system support you need to proactively manage your Oracle storage systems, with swift resolution and rapid-response hardware service when problems do arise, keeping your business information available 24/7.

Oracle Platinum Services provide an enhanced level of service for supported configurations of Oracle ZFS Storage Appliance Racked System. Oracle Platinum Services is available for Oracle ZFS Storage Appliance Racked System ZS9-2 mid-range and high-end when they are used as a backup solution for Oracle Engineered Systems. Talk to your account representative to learn the minimum configuration requirements to qualify for Oracle Platinum services.

With Oracle Advanced Customer Support, you get mission-critical support with a focused support team, proactive guidance to tailor storage systems for optimal performance and increased competitiveness, and preventative monitoring to help you achieve high availability and optimized system performance.

For more information about Oracle Premier Support, Platinum Services, and Oracle Advanced Customer Support, please speak with your Oracle representative or Oracle authorized partner, or visit oracle.com/support or oracle.com/support</



Connect with us

Call +1.800.ORACLE1 or visit oracle.com. Outside North America, find your local office at: oracle.com/contact.



B blogs.oracle.com



facebook.com/oracle



twitter.com/oracle

provided for information purposes only, and the contents hereof are subject to change without notice. This document is not warranted to be error-free, nor subject to any other warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document. This document may not be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without our prior written permission.

This device has not been authorized as required by the rules of the Federal Communications Commission. This device is not, and may not be, offered for sale or lease, or sold or leased, until authorization is obtained.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group. 0120

Disclaimer: If you are unsure whether your data sheet needs a disclaimer, read the revenue recognition policy. If you have further questions about your content and the disclaimer requirements, e-mail REVREC US@oracle.com.

